Cable Tidy Wrap

A narrow practice strip that wraps around a loosely coiled, disconnected cable. Tuck the free end under the first wrap.


NOT PHYSICALLY SAMPLE-TESTED. Counts are calculated from an assumed gauge. Swatch and check fit before committing yarn. Drawings are construction schematics, not finished photographs.

Flat panel target	4 x 18 cm
Stitches per row	6
Rows	32
Main stitch	Single crochet (sc)
Assumed planning gauge	16 stitches / 18 rows per 10 cm

Before you begin

Use a smooth medium-weight yarn suited to the intended purpose and a 5 mm hook as a starting point. You also need a ruler, tapestry needle, scissors, and removable markers. Yarn quantity is not sample-tested: use a measured swatch and the yarn planner. For covers, have the object available for a fit check.

The panel before assembly

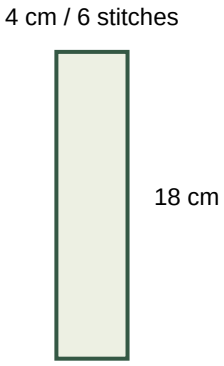

Your step-by-step plan

01 Make a swatch first

Use a smooth medium-weight yarn and a 5 mm hook as a starting point. Work a swatch larger than 10 x 10 cm in single crochet. The calculation example uses 16 stitches and 18 rows per 10 cm. This is an assumed planning gauge, not a measured sample result. Change the counts using your own swatch if it differs.

02 Begin the foundation

Chain 7 loosely. Single crochet in the second chain from the hook, then work one sc in each remaining chain. You should have 6 stitches. The skipped chain and turning chain do not count as stitches.

03 Build the panel

For rows 2-32, chain 1, turn, and work one sc in each stitch across, starting in the first actual stitch. Finish in the last actual stitch, not in the turning chain. Keep 6 stitches in every row. Use a single color unless you deliberately plan and record a variation.

04 Pause and measure

After several rows, lay the fabric down without pulling and check the width. At the assumed gauge, 6 stitches produce about 3.8 cm and 32 rows about 17.8 cm. The nominal 4 x 18 cm dimensions are rounded. Seams and folds will change the final usable size.

05 Finish and assemble

Weave ends securely. Wrap around the coil once or twice without pulling tightly; tuck the tip beneath the wrap. No permanent fastener is fitted.

06 Check before using

Remove before using or charging equipment. Do not use on hot cables or as electrical insulation.

Troubleshooting

A narrow strip is sensitive to missed edge stitches. Count all six stitches every row.

Adapt the size

Use your measured stitch and row gauge to calculate a new flat panel. This plain stitch uses a multiple of one. Add 1 foundation chains to the chosen stitch count. Account for folds, seam allowance, and the thickness of the intended object separately.

Keep a record

Yarn and lot: _____ Hook: _____ Measured gauge: _____
Changes / next step: _____

Online plan: https://yarnluma.com/projects/cable-tidy-wrap/

Tools: https://yarnluma.com/tools/ | Review policy: https://yarnluma.com/editorial/