Mini Wall Panel

A small textile panel that can display color changes and even rows. It is intentionally plain so the fabric remains the focus.


NOT PHYSICALLY SAMPLE-TESTED. Counts are calculated from an assumed gauge. Swatch and check fit before committing yarn. Drawings are construction schematics, not finished photographs.

Flat panel target	18 x 24 cm
Stitches per row	29
Rows	43
Main stitch	Single crochet (sc)
Assumed planning gauge	16 stitches / 18 rows per 10 cm

Before you begin

Use a smooth medium-weight yarn suited to the intended purpose and a 5 mm hook as a starting point. You also need a ruler, tapestry needle, scissors, and removable markers. Yarn quantity is not sample-tested: use a measured swatch and the yarn planner. For covers, have the object available for a fit check.

The panel before assembly

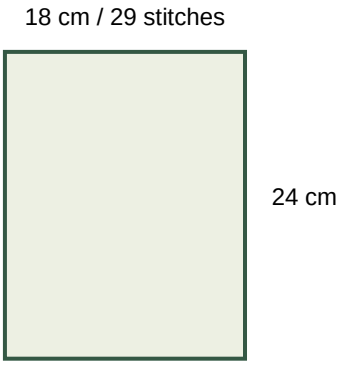

Your step-by-step plan

01 Make a swatch first

Use a smooth medium-weight yarn and a 5 mm hook as a starting point. Work a swatch larger than 10 x 10 cm in single crochet. The calculation example uses 16 stitches and 18 rows per 10 cm. This is an assumed planning gauge, not a measured sample result. Change the counts using your own swatch if it differs.

02 Begin the foundation

Chain 30 loosely. Single crochet in the second chain from the hook, then work one sc in each remaining chain. You should have 29 stitches. The skipped chain and turning chain do not count as stitches.

03 Build the panel

For rows 2-43, chain 1, turn, and work one sc in each stitch across, starting in the first actual stitch. Finish in the last actual stitch, not in the turning chain. Keep 29 stitches in every row. Use a single color unless you deliberately plan and record a variation.

04 Pause and measure

After several rows, lay the fabric down without pulling and check the width. At the assumed gauge, 29 stitches produce about 18.1 cm and 43 rows about 23.9 cm. The nominal 18 x 24 cm dimensions are rounded. Seams and folds will change the final usable size.

05 Finish and assemble

Fold the top 2 cm to the back and stitch along the fold edge to form a channel. Insert a smooth lightweight dowel. Attach hanging cord to the dowel ends, not to individual crochet stitches.

06 Check before using

Hang securely away from children and pets; cords and dowels are not toys.

Troubleshooting

Keep the channel loose enough for the dowel to slide without stretching.

Adapt the size

Use your measured stitch and row gauge to calculate a new flat panel. This plain stitch uses a multiple of one. Add 1 foundation chains to the chosen stitch count. Account for folds, seam allowance, and the thickness of the intended object separately.

Keep a record

Yarn and lot: _____ Hook: _____ Measured gauge: _____
Changes / next step: _____

Online plan: https://yarnluma.com/projects/mini-wall-panel/

Tools: https://yarnluma.com/tools/ | Review policy: https://yarnluma.com/editorial/